
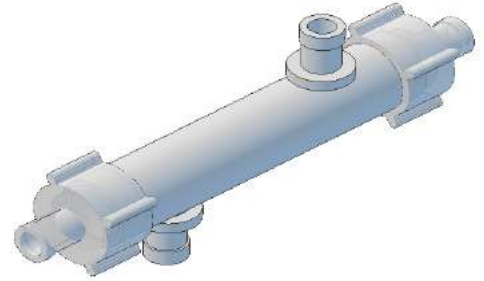


# Hollow Fiber Oxygenator, Small, PMP (sterile)

KDA0045-S

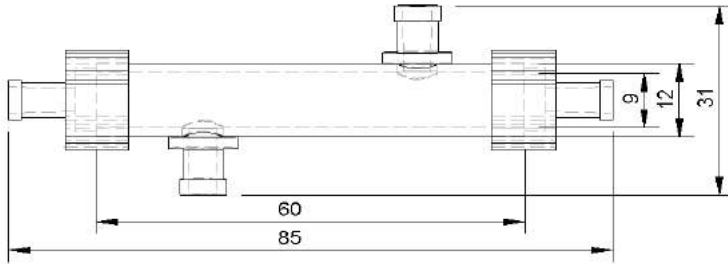

## Membrane

Membrane material: Polymethylpentene, PMP  
Geometry (ID/OD): 200µm/ 380µm

## Housing

Material of housing: Polycarbonate  
Dimensions: see drawing  
ICS Connectors: 2 x female luer connectors (polycarbonate)  
ECS Connectors: 2 x female luer connectors (polycarbonate)  
Potting material: Polyurethane

## Module

Number of fibres: 300 +/- 15  
Package density: approx 50%  
Active fibre length: 45 +/- 3 mm  
Inner | Outer fibre surface: 80 (+/- 5 cm<sup>2</sup>) | 160 (+/- 10 cm<sup>2</sup>)  
Intracapillary volume: approx 0.6 ml  
Extracapillary volume: approx 1.3 ml  
Max operating pressure: 1.5 bar

## Miscellaneous

Quality control: 100% integrity tested (housing and fibre)  
Sterility: Sterile, Gamma irradiated

## Cautions

Storage: dry, 5—40°C  
Usage: Single use, do not autoclave